

RADIO SHACK & CONDUCTOR HEAVY DUTY
 MOLDED NYLON MALE OR FEMALE PLUG.
 FEMALE PART # 274-155
 MALE PART # 274-152

FIG. 2

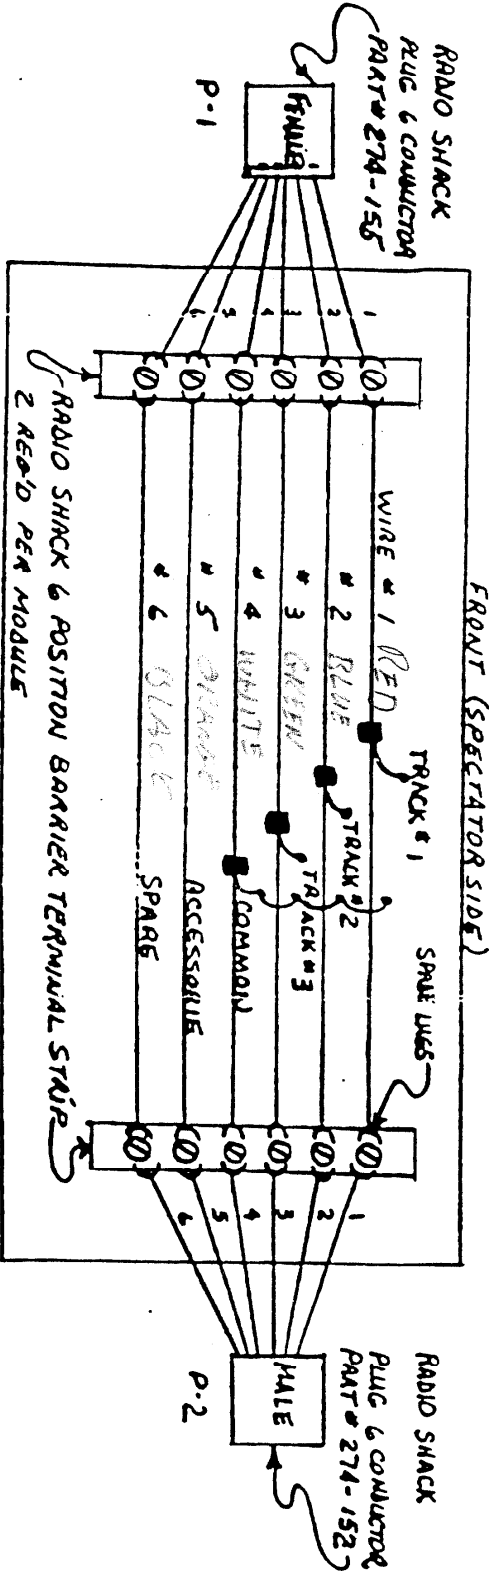


FIG. 3

- 1.- ALL WIRE TO BE 16GA. STRANDED
- 2.- ALL CONNECTIONS TO BARRIER TERMINAL STRIP WILL USE SPADE LUGS SOLDERED TO WIRE.
- 3.- WIRE #1 SHOULD TERMINATE TO EITHER P1, OR P2, SEE FIG 1 ABOVE. NYLON CONNECTORS HAVE RAISED NUMBERS ON REAR END. NUMBERS 1 TO 6 CORRESPOND TO WIRES 1 TO 6.
4. USE SPlice/TAP CONNECTORS, OR EQUIVALENT CONNECTION TO CONNECT TRACK POWER & GROUND TO TRACK 1 THRU 3.
5. USE MALE QUICK CONNECT DEVICES, SOLDERED TO POWER AND GROUND WIRES AND INSERT INTO BOTTOM OF GARGRAVES TRACK, SEE FIG 3